

PC1500


Size: AA (LR6)

Alkaline-Manganese Dioxide Battery

Zn/MnO₂




Dimensions shown are IEC standards

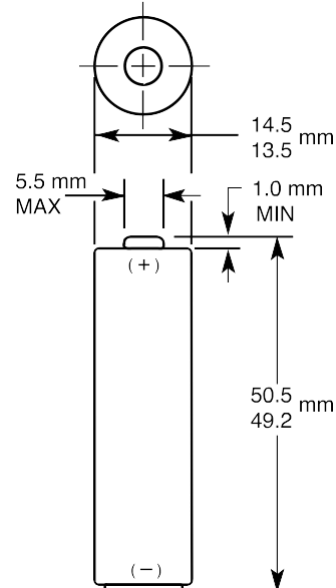


Nominal voltage	1.5 V
Impedance	120 m-ohm @ 1 kHz
Typical weight	24 g (0.8 oz)
Typical volume	8.4 cm ³ (0.5 in ³)
Terminals	Flat
Storage temperature range	5°C to 30°C (41°F to 86°F)
Operating temperature range	-20°C to 54°C (-4°F to 130°F)
Designation	IEC: LR6

Procell AA Constant Current

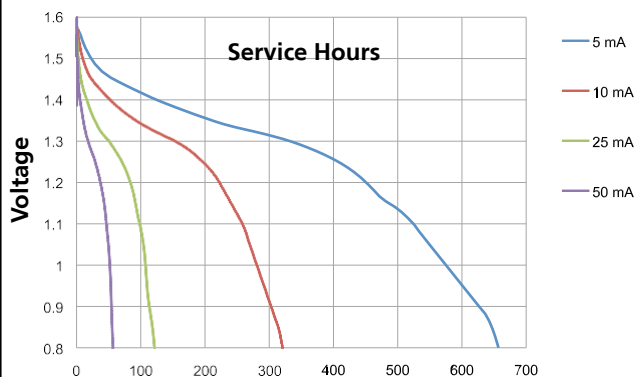

Procell AA Constant Current

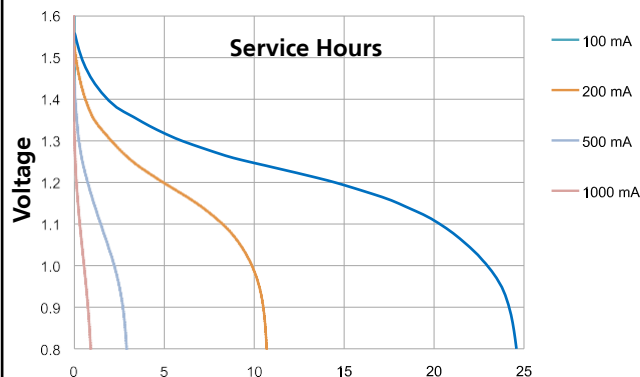

DURACELL
BATTERIES

DISK-O-TAPE, INC.

23775 Mercantile Road
Cleveland, Ohio 44122-5917 U.S.A.
216-765-8273 • 800-932-8273
www.disk-o-tape.com





Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

PC1500

Size: AA (LR6)

Alkaline-Manganese Dioxide Battery

Zn/MnO₂

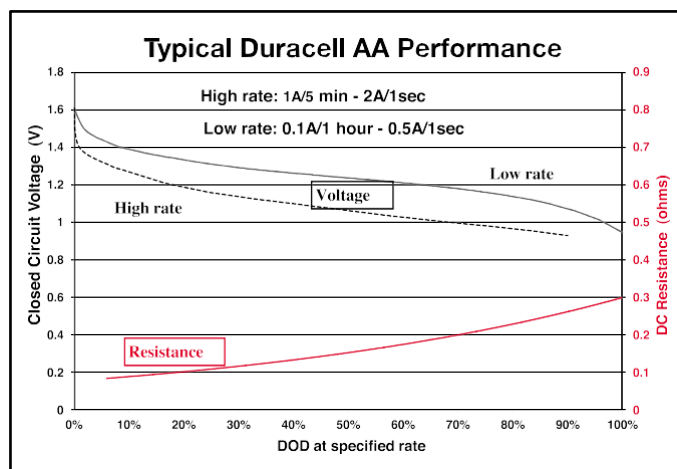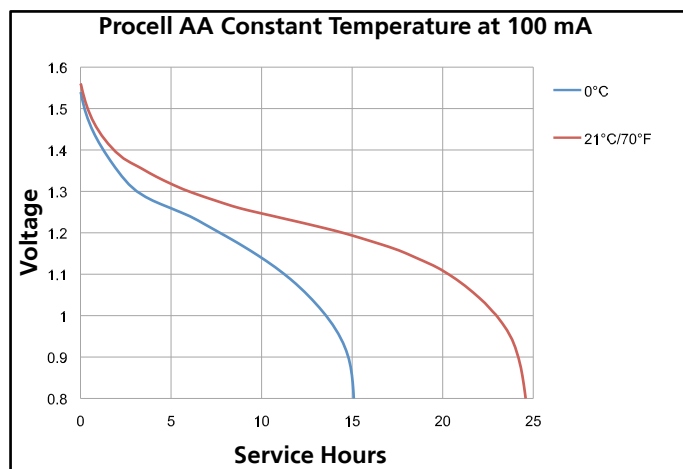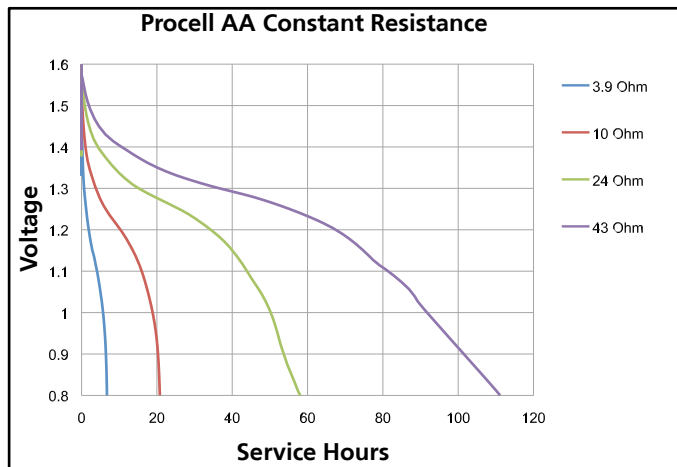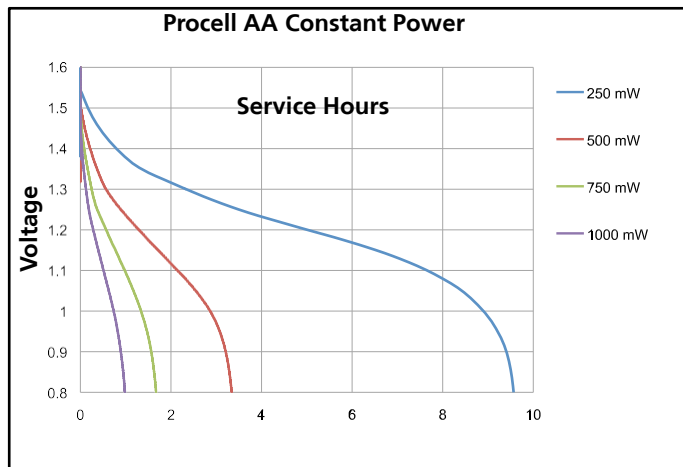

DURACELL®
BATTERIES

DISK-O-TAPE, INC.

23775 Mercantile Road
Cleveland, Ohio 44122-5917 U.S.A.
216-765-8273 • 800-932-8273
www.disk-o-tape.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.